

### FEATURES

- ✧ High current capability, low forward voltage
- ✧ Excellent high temperature stability
- ✧ Low power loss, and high efficiency
- ✧ High forward surge capability
- ✧ RoHS compliant
- ✧ Trench MOS Schottky technology

### MACHANICAL DATA

- ✧ Case: DO-201AD(DO-27) plastic package
- ✧ Terminal: Matte tin plated, solderable per MIL-STD-750, Method 2026
- ✧ Molding Compound Flammability Rating:UL94-0
- ✧ High temperature soldering guaranteed: 260°C/10second
- ✧ Packed with FRP substrate and epoxy underfilled

### ORDERING INFORMATION

- ✧ Device: SB560L
- ✧ Package: DO-201AD(DO-27)
- ✧ Marking: SB560L
- ✧ Material: RoHS compliant
- ✧ Packing: Tape & Ammo
- ✧ Quantity per box: 1,250pcs


### APPLICATIONS

- ✧ Switching mode power supply applications
- ✧ Portable equipment battery applications
- ✧ High frequency rectification
- ✧ DC/DC converter

### PIN CONFIGURATION



### PACKAGE OUTLINE

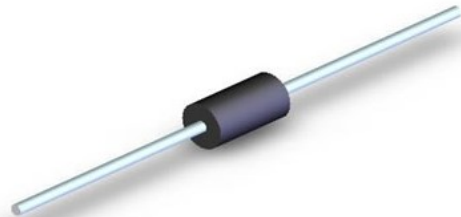





### ABSOLUTE MAXIMUM RATING (Tamb=25°C, unless otherwise specified)

Symbol	Parameter	Value	Units
$V_{RRM}$	Repetitive Peak Reverse Voltage	60	V
$I_{F(AV)}$	Average Forward Current	5	A
$I_{FSM}$	Peak Forward Surge Current, 8.3ms single half sine-wave	80	A
$T_J$ & $T_{STG}$	Junction and Storage Temperature	-40~+150	°C


### ELECTRICAL CHARACTERISTICS (Tamb=25°C, unless otherwise specified)

Symbol	Parameter	Test Condition	Min	Typ	Max	Units
$V_F$	Forward Voltage	$I_F = 5A$			0.49	V
$V_R$	Reverse Breakdown Voltage	$I_R = 0.3mA$	60			V
$I_R$	Reverse Leakage Current	$V_R = 60V$			300	μA

### ELECTRICAL CHARACTERISTICS CURVE

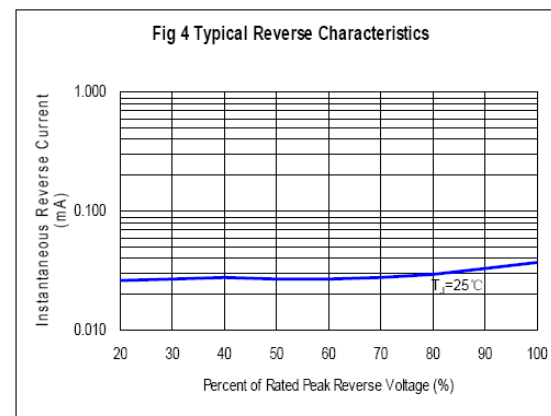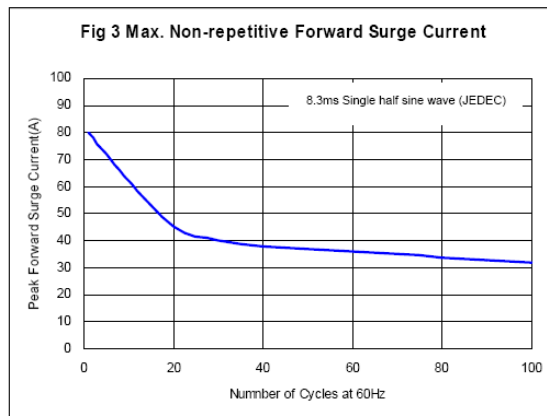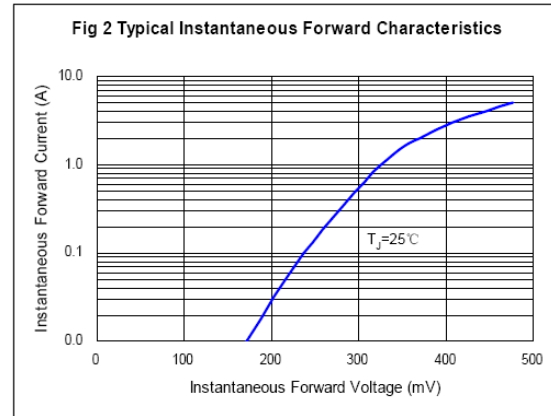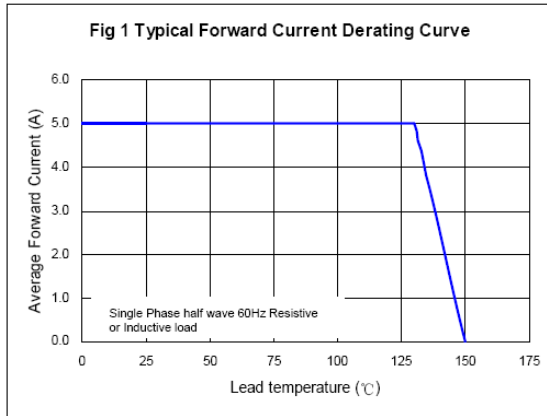

### DO-201AD(DO-27) PACKAGE OUTLINE DIMENSIONS

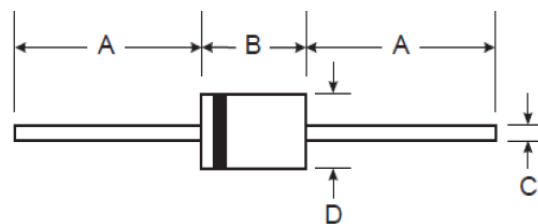

DO-201AD(DO-27) Plastic				
Dim	Min		Max	
	Inch	mm	Inch	mm
A	1.0	25.4	-	-
B	0.285	7.2	0.375	9.5
C	0.039	1.0	0.052	1.3
D	0.190	4.8	0.210	5.3