

Surface Mount Superfast Recovery Rectifier

Reverse Voltage – 50 to 600 V

Forward Current – 3 A

FEATURES

- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Superfast reverse recovery time
- Lead free in comply with EU RoHS 2011/65/EU directives

MECHANICAL DATA

- Case : SMC
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight : 0.22g / 0.0077oz

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode


 Top View
 Marking Code: ES3A~ES3J
 Simplified outline SMC and symbol

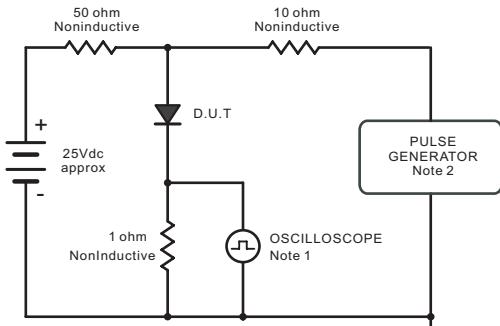
Absolute Maximum Ratings and Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

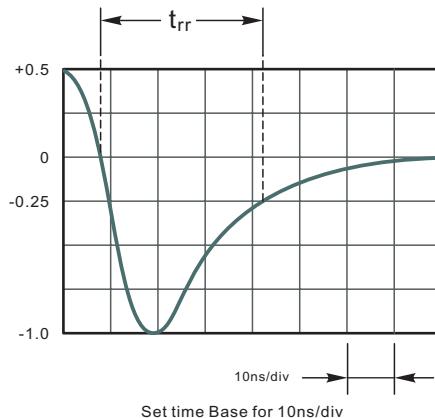
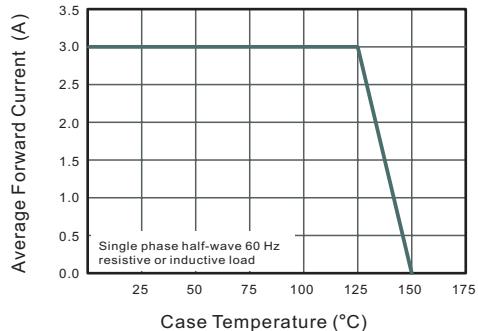
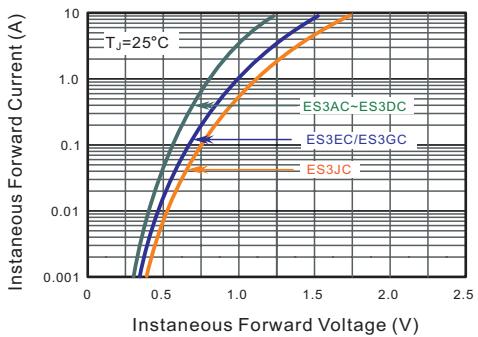
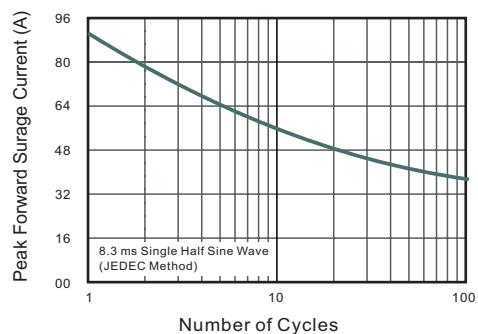
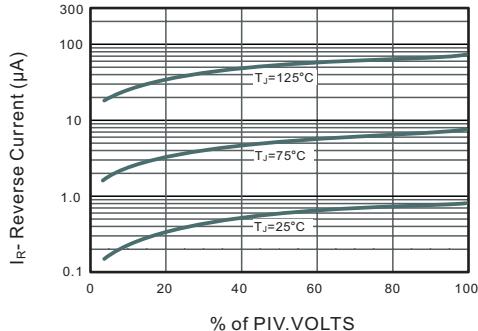
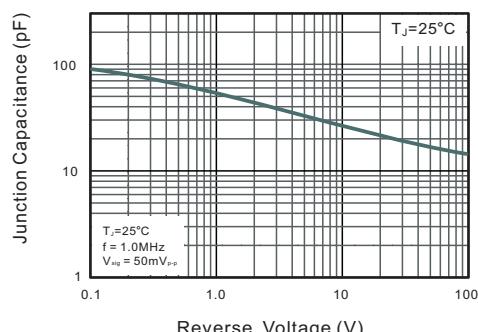
Parameter	Symbols	ES3AC	ES3BC	ES3CC	ES3DC	ES3EC	ES3GC	ES3JC	Units				
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	150	200	300	400	600	V				
Maximum RMS voltage	V _{RMS}	35	70	105	140	210	280	420	V				
Maximum DC Blocking Voltage	V _{DC}	50	100	150	200	300	400	600	V				
Maximum Average Forward Rectified Current at T _c = 125 °C	I _{F(AV)}	3						A					
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load	I _{FSM}	90						A					
Maximum Forward Voltage at 3 A	V _F	1		1.25		1.68		V					
Maximum DC Reverse Current T _a = 25 °C at Rated DC Blocking Voltage T _a = 125 °C	I _R	5 100						μA					
Typical Junction Capacitance at V _R =4V, f=1MHz	C _j	40						pF					
Maximum Reverse Recovery Time ⁽¹⁾	t _{rr}	35						ns					
Typical Thermal Resistance ⁽²⁾	R _{θJA} R _{θJC}	40 16						°C/W					
Operating and Storage Temperature Range	T _j , T _{stg}	-55 ~ +150						°C					

 (1) Measured with I_F = 0.5 A, I_R = 1 A, I_{rr} = 0.25 A.

(2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

Fig.1 Reverse Recovery Time Characteristic And Test Circuit Diagram


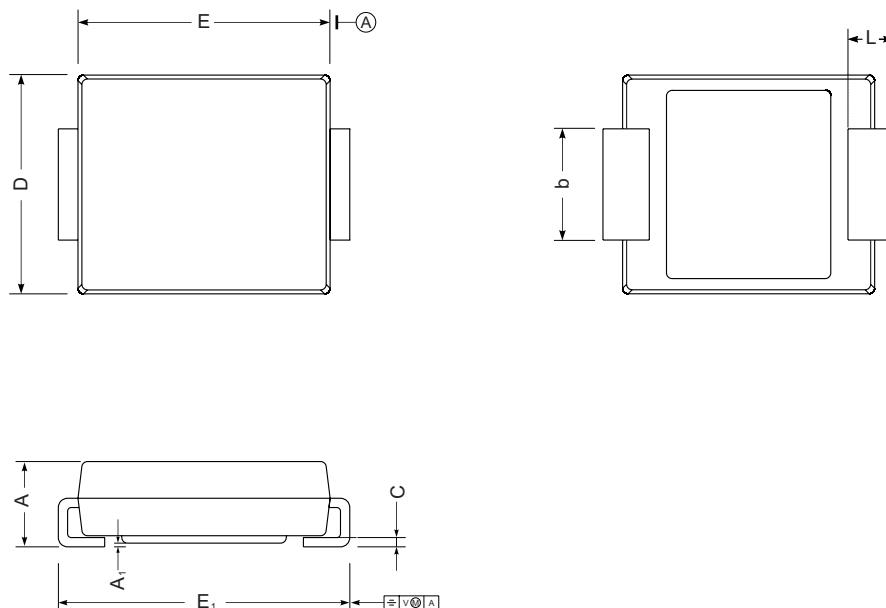
Note: 1. Rise Time = 7ns, max.
 Input Impedance = 1megohm,22pF.
 2. Ries Time =10ns, max.
 Source Impedance = 50 ohms.


Fig.2 Maximum Average Forward Current Rating

Fig.4 Typical Forward Characteristics

Fig.6 Maximum Non-Repetitive Peak Forward Surge Current

Fig.3 Typical Reverse Characteristics

Fig.5 Typical Junction Capacitance


PACKAGE OUTLINE

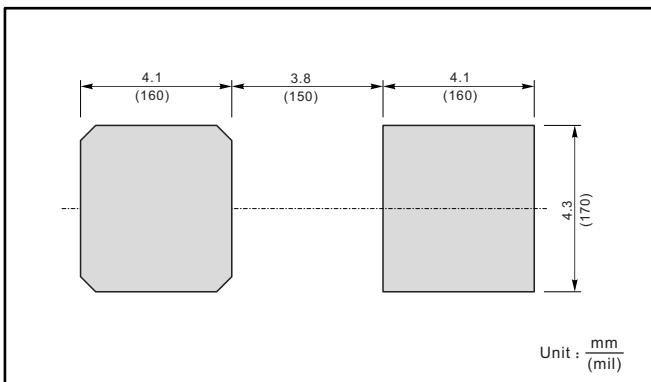
Plastic surface mounted package; 2 leads

SMC



SMC mechanical data

UNIT		A	E	D	E ₁	A ₁	C	L	b
mm	max	2.62	7.0	6.2	8.0	0.21	0.31	1.6	3.25
	min	2.00	6.5	5.6	7.6	0.05	0.15	0.9	2.75
mil	max	103	276	244	315	8.3	12	63	128
	min	79	256	220	299	2.0	5.9	35	108

The recommended mounting pad size

Marking

Type number	Marking code
ES3AC	ES3A
ES3BC	ES3B
ES3CC	ES3C
ES3DC	ES3D
ES3EC	ES3E
ES3GC	ES3G
ES3JC	ES3J